


插裝式卸荷閥





■ 型號說明

VSQ	08	-02	-K	-20
系列號碼	稱呼口徑	壓力範圍 bar	調節形式	設計編號
VSQ系列 插式卸荷閥	08, 10	對於08口徑： 02: 4~20 04: 7~40 09: 11~89 16: 21~165 對於10口徑： 02: 6~27 04: 14~55 10: 21~103 14: 28~145	無：工具調整式 K：手把調整式	20

■ 規格表

型 號	操作壓力 bar	最大流量 l/min	重量 kg
VSQ-08	350	18	0.3
VSQ-10		38	
流 體 型 式	推 薦 使 用：ISO VG32、46、68		
推 薦 粘 度	油 度40℃時 為10cst-400cst		
環 境 溫 度	- 15℃ - 70℃		
油 液 污 染 度	符合ISO 19/16 建議用25μm、β25≥75的進油濾油器		

■ 曲綫圖 測試條件：油溫：T=50℃，粘度：35cst

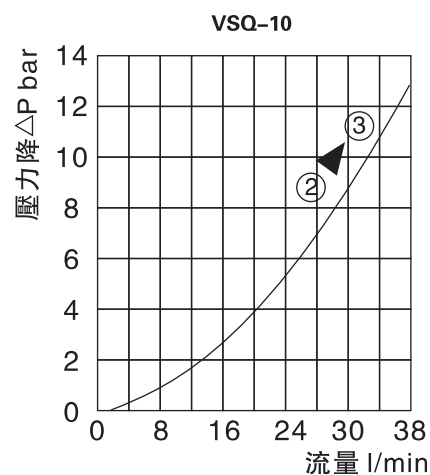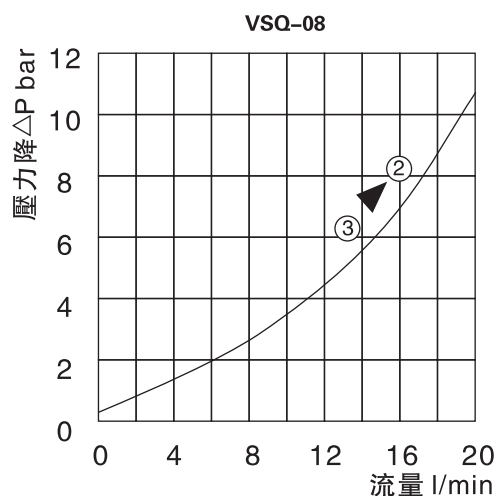

Technical drawing of the front view of the 1000 Series 1/2" component. The drawing shows a vertical assembly with a central body and a top cap. Dimension lines indicate a total height of 76.7 and a lower section height of 40.6. The lower section is divided into three parts labeled ①, ②, and ③. Part ① is the bottom flange, part ② is the middle section with four mounting holes, and part ③ is the top section of the lower assembly with four mounting holes. The top cap has a series of horizontal lines indicating a threaded or grooved surface.

