

性能参数 Specifications

工作温度: -30℃~ +120℃
过滤精度: 100, 180微米
Operation temperature:-30℃ to +120℃
Element material:Stainless steel mesh
Filtration rating: 100, 180 micron



订货代码 Ordering code

SEF 0150 W 180 N B20

滤芯型号 Element type

流量 Flow rate (L/min)
0015, 0020, 0045, 0080, 0150, 0200, 0330, 0500, 0660, 0800, 1000

滤芯材料 Element material
W: 金属网 Wire mesh

过滤精度 Filtration rating(μ m)
(W): 100,180


密封材料 Seals
N:丁晴橡胶 NBR

接口形式/尺寸 Port type/Size


流量 Flow Rate	形式/尺寸 Type/Size										
	B(BSPP 管螺纹 thread)										
	06	08	12	16	20	24	32	40	48	56	64
0015	●										
0020		●									
0045			●								
0080				●							
0150					●						
0200						●					
0330							●				
0500								●			
0660									●		
0800										●	
1000											●
B06=G3/8, B08=G1/2, B12=G3/4, B16=G1, B20=G1-1/4, B24=G1-1/2											
B32=G2, B40=G2-1/2, B48=G3, B56=G3-1/2, B64=G4											



压降曲线 Pressure Drop Curves

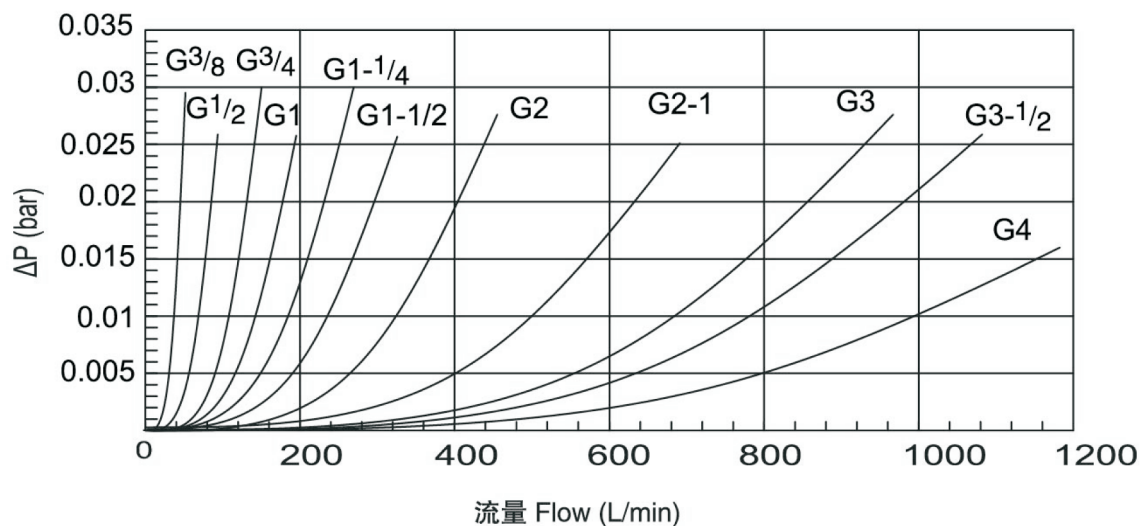

外形安装尺寸 Dimensions

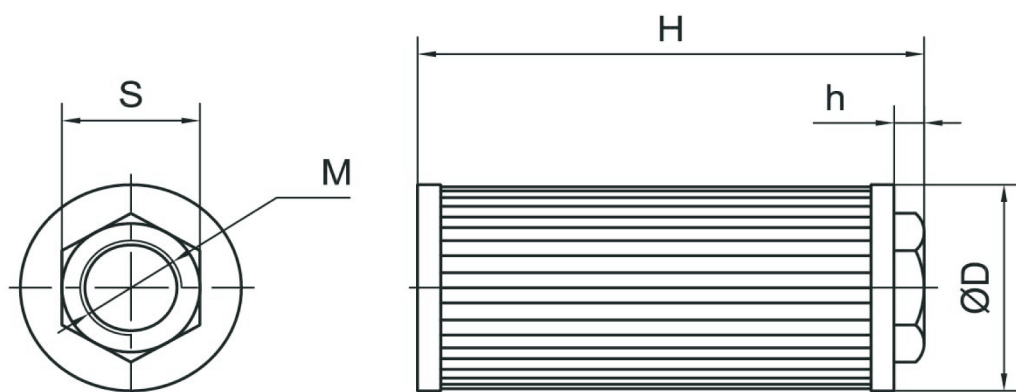

型号 Type	M	D	H	h	S
SEF0015	G ^{3/8}	70	105	13	35
SEF0020	G ^{1/2}		145		
SEF0045	G ^{3/4}		145		
SEF0080	G ¹	100	180		60
SEF0150	G ^{1-1/4}		200		
SEF0200	G ^{1-1/2}		240		
SEF0330	G ²	140	260	35	90
SEF0500	G ^{2-1/2}		280		
SEF0660	G ³	180	330		140
SEF0800	G ^{3-1/2}		400		
SEF1000	G ⁴				

性能参数 Specifications

工作温度: -30℃ ~ +120℃
工作压力: 不锈钢网, 铜网
过滤精度: 100, 180微米
Operation temperature:-30℃ ~ +120℃
Element material:Stainless steel/copper mesh
Filtration rating: 100, 180 micron



订货代码 Ordering Code SEF 0600 W 180 N 150 - H

过滤器型号 Element type _____

流量 Flow rate (L/min) _____
0200, 0350, 0500, 0600, 0800, 1000, 1200

滤芯材料 Element material _____
S: 不锈钢网 stainless steel mesh W: 铜网 copper mesh

过滤精度 Filtration rating(μ m) _____
100,180

密封材料 Seals _____
N:丁晴橡胶 NBR, V: 氟橡胶 Viton


滤芯外径 Element OD. _____
90, 125, 150, 200

总高度 Height H _____
根据实际, 按下表范围选取 Get it from below table by request


型号 Type	D 外径O.D.	H 总高Height	滤芯型号 Elements type
SEF0200...90-H	90	205-755	SEE0200...90
SEF0350...125-H	125	270-775	SEE0350...125
SEF0500...150-H	150	305-810	SEE0500...150
SEF0600...150-H			SEE0600...150
SEF0800...200-H	200		SEE0800...200
SEF1000...200-H			SEE1000...200
SEF1200...200-H			SEE1200...200



压降曲线 Pressure Drop Curves

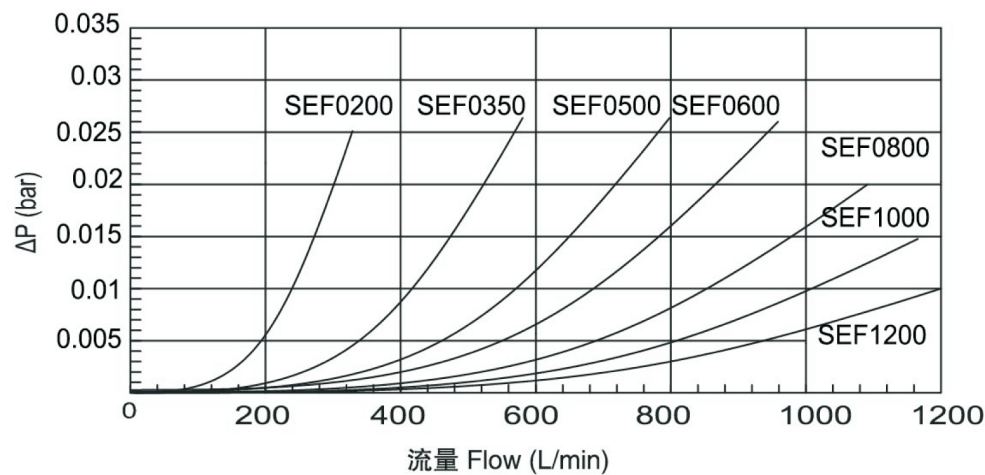

外形安装尺寸 Dimensions

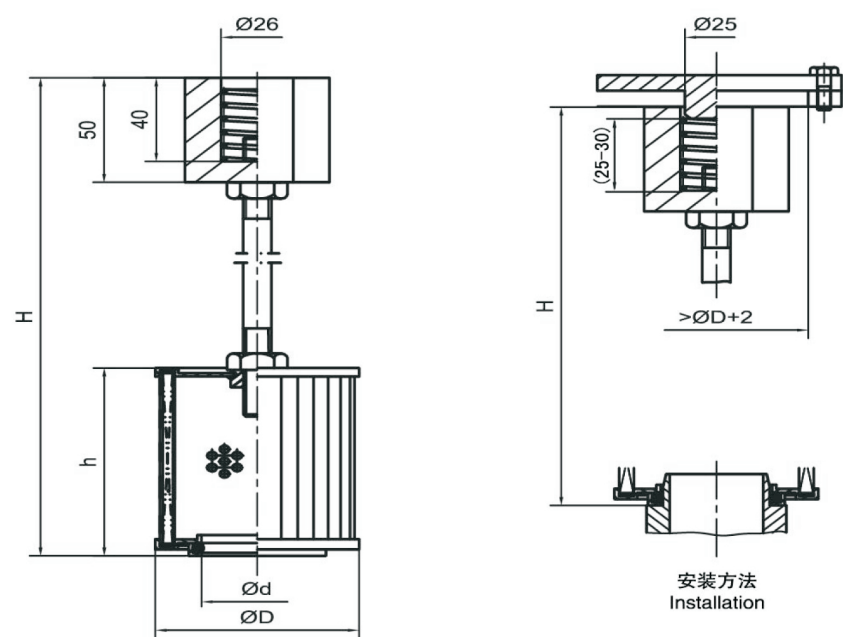

型号 Type	d	D	h	H
SEF0200	48.5	90	143	205-755
SEF0350	59.5	125	163	270-775
SEF0500	76.5	150	195	305-810
SEF0600	89.5	150	195	
SEF0800	100	200	195	
SEF1000	114.5	200	295	
SEF1200	139	200	395	