

疊加式單向閥



■ 特性

- MCV系列積層型止逆閥 P孔、T孔、A孔、B孔、W孔等...均可使用。
- 閥本體鑄鐵強度夠且耐久性，壽命長。
- 內部硬鋼原件提高產品壽命。


■ 型號說明

MCV	-02	-P	1	-20
系列號碼	稱呼口徑	動作形式	開啓力	設計編號
MCV系列 疊加式單向閥	02:1/4"(6mm) 03:3/8"(9mm) 04:1/2"(12mm) 06:3/4"(19mm)	請參照動作形式圖	對於02、03: 1、0.5 2、2.5 3、4 對於04、06: 1、0.5 2、3.5	20

■ 規格表



型號	最大壓力 bar	適用管徑	最大流量 l/min	重量 kg
MCV-02-P,T,A,B,C,D	315	1/4"	40	1.0
MCV-02-W		1/4"		1.2
MCV-03-P,T,C,D		3/8"	80	2.5
MCV-03-W,A,B		3/8"		2.8
MCV-06-W,A,B		3/4"	190	13.0
MCV-04-P		1/2"	300	4.8
MCV-06-P,T		3/4"	190	10.5
流體型式		推薦使用：ISO VG32、46、68		
推薦粘度	油度40°C時為10cst-400cst			
環境溫度	-15°C-70°C			
油液污染度	符合ISO 19/16 建議用25μm、β25≥75的進油濾油器			

■ 動作形式


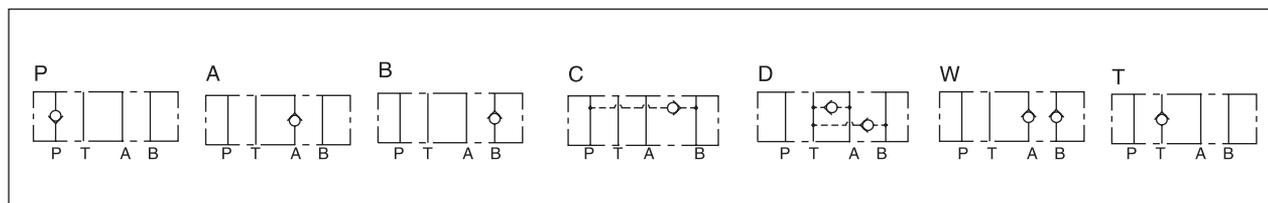


■ 曲綫圖 測試條件：油温：T=50°C，粘度：35cst

MCV-02

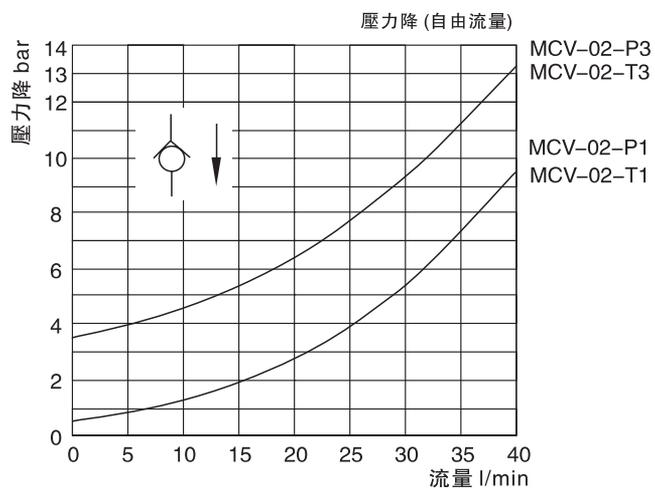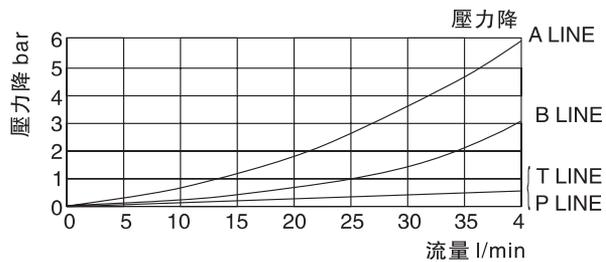


MCV-03

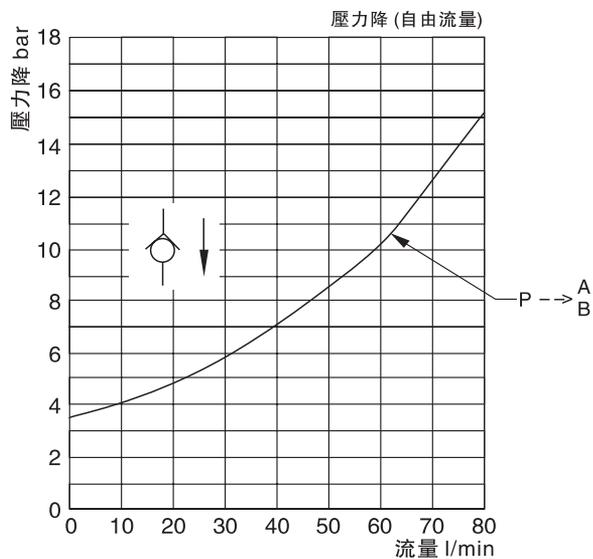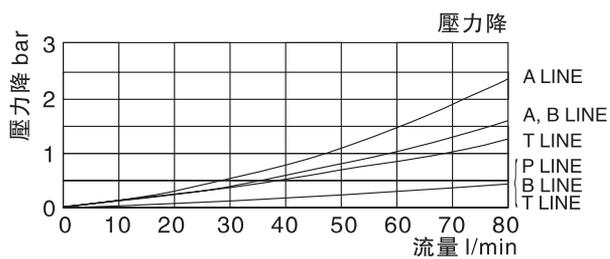


■ 尺寸圖



MCV-02-P. T. A. B. C

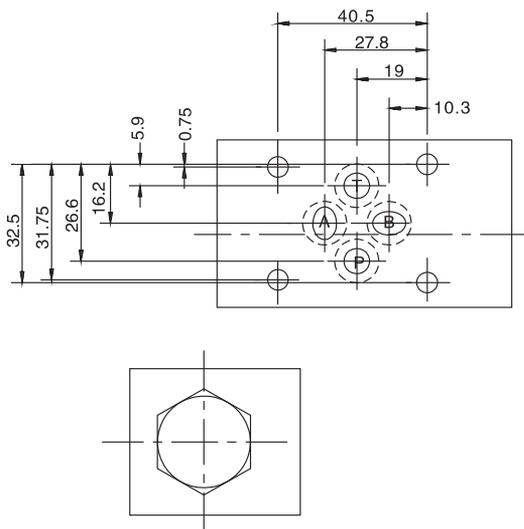



■ 安裝尺寸符合：ISO 4401 標準

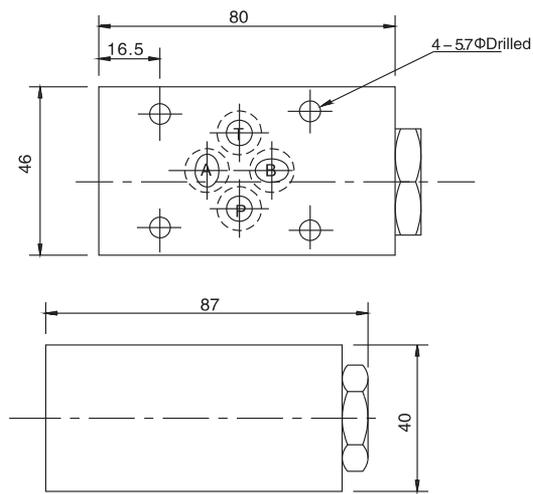

MCV-02-D

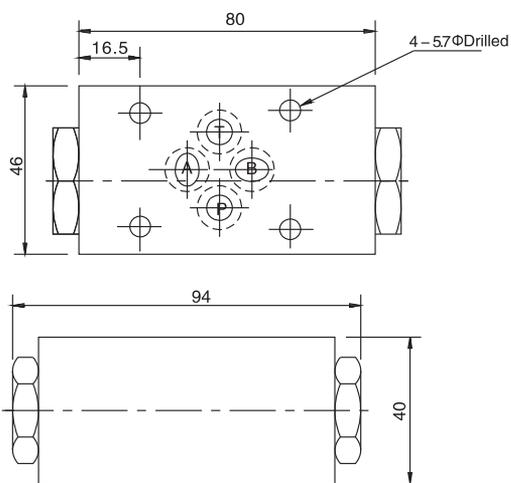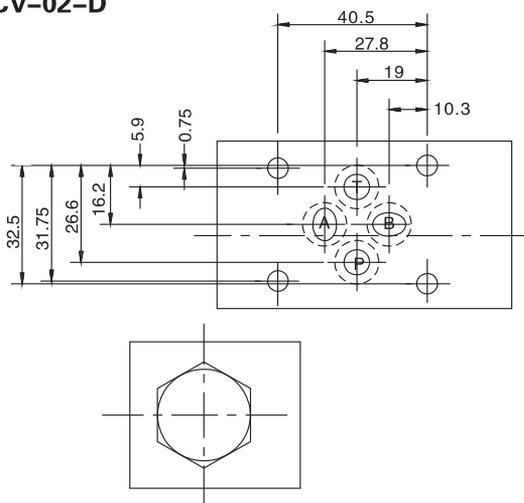


MCV-02-W

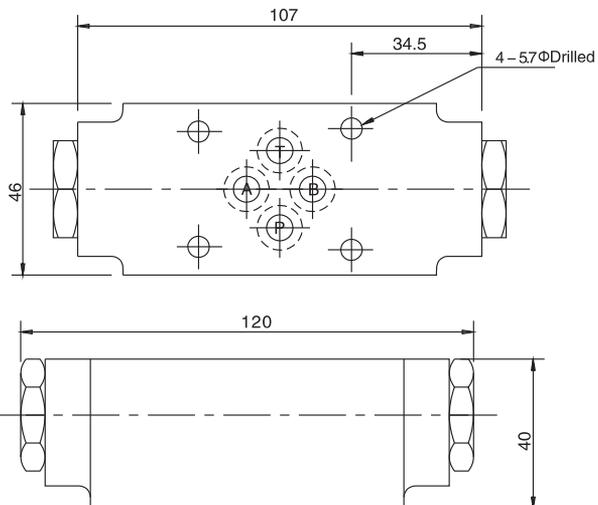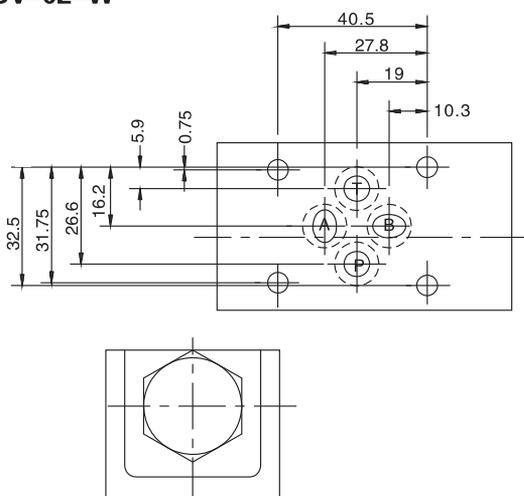


■ 尺寸圖



MCV-03-P. T. C. D

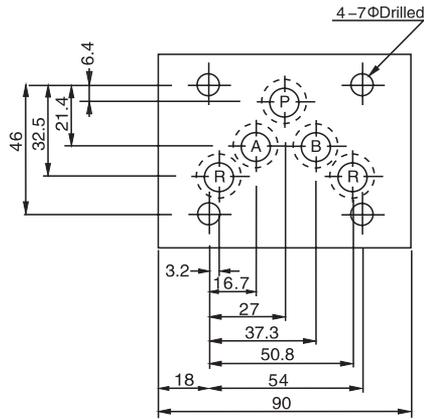


■ 安裝尺寸符合: ISO 4401 標準

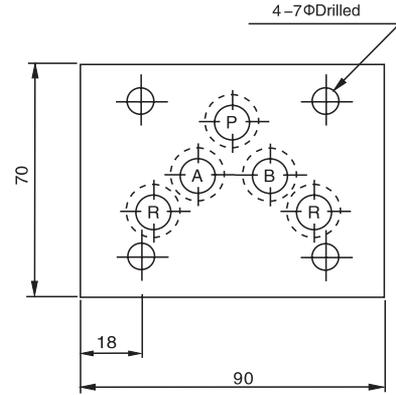

MCV-03-W. A. B

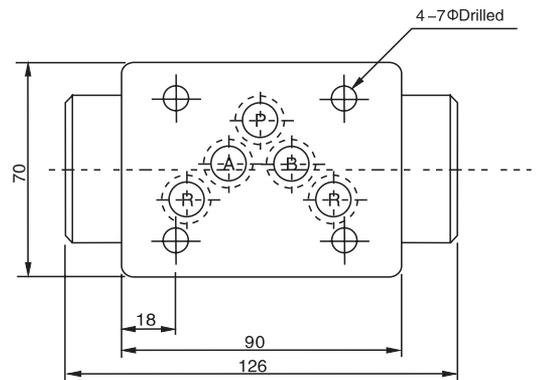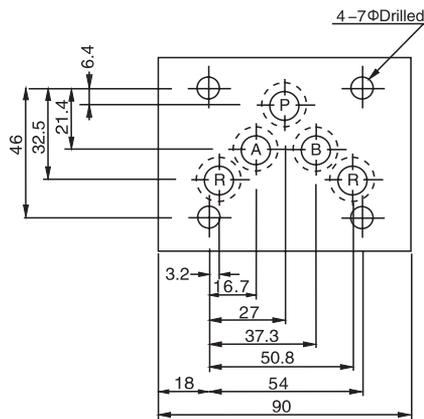

MCV-04-P

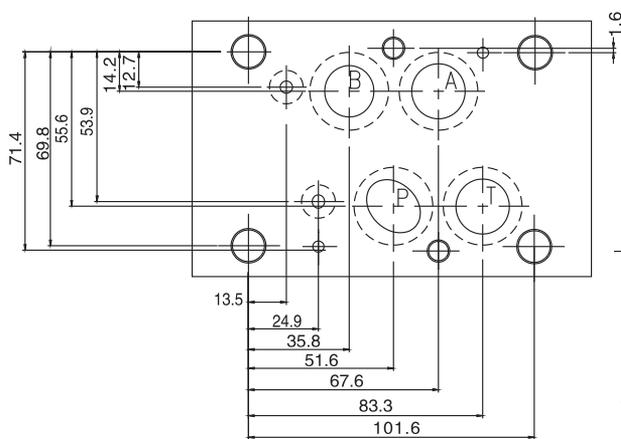

■ 安裝尺寸符合: ISO 4401 標準

